

5

...

..

10

.

15

.

CLEANING WIPE

Gregory Szewczyk  
Barbara Thomas  
Karen Wisniewski

## CLEANING WIPE

### Related Application

This application is a continuation in part application of U.S. Serial No. 10/412,909 filed 4/14/03 which in turn is a continuation in part application of U.S. Serial No. 10/086,165 filed 2/27/02 which in turn is a continuation in part application of U.S. Serial No. 10/008,715 filed 11/13/01.

### Field of Invention

The present invention relates to a cleaning wipe for dishware, teeth, human skin, hair and fabric which is a single or multi layer fabric substrate which has been impregnated with a liquid cleaning composition.

### Background of the Invention

The patent literature describes numerous wipes for both body cleaning, oral cleaning, fabric cleaning, hair cleaning and cleaning of hard surfaces but none describe wipes for cleaning teeth, human skin, hair, fabrics or cleaning dishware, flatware, pots and pans. U.S. Patent Nos. 5,980,931, 6,063,397 and 6,074,655 teach a substantially dry disposable personal cleansing product useful for both cleansing and conditioning the skin and hair. US Patent No. 6,060,149 teaches a disposable wiping article having a substrate comprising multiple layers.

U.S. Patent Nos. 5,756,612; 5,763,332; 5,908,707; 5,914,177; 5,980,922 and 6,168,852 teach cleaning compositions which are inverse emulsions.

U.S. Patent Nos. 6,183,315 and 6,183,763 teach cleaning compositions containing a proton donating agent and having an acidic pH. U.S. Patent Nos. 5,863,663; 5,952,043; 6,063,746 and 6,121,165 teaches cleaning compositions which are oil in water emulsions.

## Summary of the Invention

A single use cleaning wipe for dishwashing application comprises a water insoluble substrate, impregnated with a cleaning composition containing three anionic surfactants, an amine oxide surfactant, at least one solubilizing agent and water.

5        The liquid cleaning compositions of this invention are not an emulsion and do not contain potassium sorbate, a polysaccharide polymer, a polycarboxylate polymer, polyvinyl alcohol polymer, polyvinylpyrrolidone polymer or methyl vinyl ether polymer.

## Detailed Description of the Invention

10        The present invention relates to a cleaning wipe for dishware, flatware, pots and pans which comprises approximately by weight:

(a)     5% to 80% of a cleaning composition which comprises approximately by weight:

(i)     4% to 8% of a sodium salt of a C<sub>8</sub>-C<sub>16</sub> linear alkyl benzene sulfonate surfactant;

15        (ii)     9% to 14% of a magnesium salt of a C<sub>8</sub>-C<sub>16</sub> linear alkyl benzene sulfonate surfactant;

(iii)     9% to 14% of an ammonium or sodium salt of an ethoxylated C<sub>8</sub>-C<sub>18</sub> alkyl ether sulfate surfactant;

(iv)     5% to 10% of an amine oxide surfactant;

20        (v)     0 to 10%, more preferably 0.5 wt. % to 10 wt. % of at least one solubilizing agent; and

(vi)     the balance being water, wherein the composition does not contain potassium sorbate, a polysaccharide polymer, a polycarboxylate polymer, polyvinyl alcohol polymer, polyvinylpyrrolidone polymer or methyl vinyl ether polymer; and

25        (b)     20% to 95% of a water insoluble substrate, wherein said water insoluble substrate is impregnated with said cleaning composition.

The anionic sulfonate surfactants which may be used in the detergent of this invention are selected from the consisting of water soluble and include the sodium, potassium, ammonium, magnesium and ethanolammonium salts of linear C<sub>8</sub>-C<sub>16</sub> alkyl

benzene sulfonates; C<sub>10</sub>-C<sub>20</sub> paraffin sulfonates, alpha olefin sulfonates containing about 10-24 carbon atoms and C<sub>8</sub>-C<sub>18</sub> alkyl sulfates and mixtures thereof.

The paraffin sulfonates may be monosulfonates or di-sulfonates and usually are mixtures thereof, obtained by sulfonating paraffins of 10 to 20 carbon atoms. Preferred  
 5 paraffin sulfonates are those of C<sub>12</sub>-18 carbon atoms chains, and more preferably they are of C<sub>14</sub>-17 chains. Paraffin sulfonates that have the sulfonate group(s) distributed along the paraffin chain are described in U.S. Patents 2,503,280; 2,507,088; 3,260,744; and 3,372,188; and also in German Patent 735,096. Such compounds may be made to specifications and desirably the content of paraffin sulfonates outside the  
 10 C<sub>14</sub>-17 range will be minor and will be minimized, as will be any contents of di- or poly-sulfonates.

Examples of suitable other sulfonated anionic detergents are the well known higher alkyl mononuclear aromatic sulfonates, such as the higher alkylbenzene sulfonates containing 9 to 18 or preferably 9 to 16 carbon atoms in the higher alkyl  
 15 group in a straight or branched chain, or C<sub>8</sub>-15 alkyl toluene sulfonates. A preferred alkylbenzene sulfonate is a linear alkylbenzene sulfonate having a higher content of 3-phenyl (or higher) isomers and a correspondingly lower content (well below 50%) of 2-phenyl (or lower) isomers, such as those sulfonates wherein the benzene ring is attached mostly at the 3 or higher (for example 4, 5, 6 or 7) position of the alkyl group  
 20 and the content of the isomers in which the benzene ring is attached in the 2 or 1 position is correspondingly low. Preferred materials are set forth in U.S. Patent 3,320,174, especially those in which the alkyls are of 10 to 13 carbon atoms.

The C<sub>8</sub>-18 ethoxylated alkyl ether sulfate surfactants have the structure




wherein n is about 1 to about 22 more preferably 1 to 3 and R is an alkyl group having about 8 to about 18 carbon atoms, more preferably 12 to 15 and natural cuts, for example, C<sub>12</sub>-14 or C<sub>12</sub>-16 and M is an ammonium cation or a metal cation, most preferably sodium.

The ethoxylated alkyl ether sulfate may be made by sulfating the condensation product of ethylene oxide and C<sub>8-10</sub> alkanol, and neutralizing the resultant product.


The ethoxylated alkyl ether sulfates differ from one another in the number of carbon atoms in the alcohols and in the number of moles of ethylene oxide reacted with one mole of such alcohol. Preferred ethoxylated alkyl ether polyethenoxy sulfates contain 12 to 15 carbon atoms in the alcohols and in the alkyl groups thereof, e.g., sodium myristyl (3 EO) sulfate.

Ethoxylated C<sub>8-18</sub> alkylphenyl ether sulfates containing from 2 to 6 moles of ethylene oxide in the molecule are also suitable for use in the invention compositions. These detergents can be prepared by reacting an alkyl phenol with 2 to 6 moles of ethylene oxide and sulfating and neutralizing the resultant ethoxylated alkylphenol. The concentration of the ethoxylated alkyl ether sulfate surfactant is about 9 to about 14 wt. %.

Amine oxide semi-polar nonionic surfactants comprise compounds and mixtures of compounds having the formula:

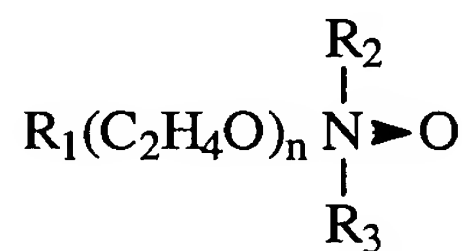

wherein R<sub>1</sub> is an alkyl, 2-hydroxyalkyl, 3-hydroxyalkyl, or 3-alkoxy-2-hydroxypropyl radical in which the alkyl and alkoxy, respectively, contain from 8 to 18 carbon atoms, R<sub>2</sub> and R<sub>3</sub> are each methyl, ethyl, propyl, isopropyl, 2-hydroxyethyl, 2-hydroxypropyl, or 3-hydroxypropyl, and n is from 0 to 10. Particularly preferred are amine oxides of the formula:

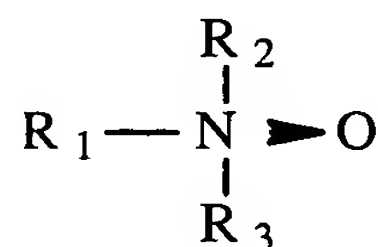

wherein R<sub>1</sub> is a C<sub>12-16</sub> alkyl and R<sub>2</sub> and R<sub>3</sub> are methyl or ethyl. The above ethylene oxide condensates, amides, and amine oxides are more fully described in U.S. Pat. No. 4,316,824 which is hereby incorporated herein by reference.

The instant composition can optionally contain 0 to 10 wt. %, more preferably 0.5 wt. % to 8 wt. % of a C<sub>12-14</sub> alkyl monoalkanol amide such as lauryl monoalkanol amide.

Polyethylene glycol which can be optionally used at a concentration of 0.5 wt. % to 10 wt. % in the instant composition has a molecular weight of 200 to 1,000, wherein the polyethylene glycol has the structure



wherein n is 4 to 52.

The instant light duty liquid compositions can contain about 0 wt. % to about 10 wt. %, more preferably about 0.5 wt. % to about 8 wt. %, of at least one solubilizing agent selected from the group consisting of a C<sub>2-5</sub> mono, dihydroxy or polyhydroxy alkanols such as ethanol, isopropanol, glycerol ethylene glycol, diethylene glycol, propylene glycol, and hexylene glycol and mixtures thereof and alkali metal cumene, toluene or xylene sulfonates such as sodium cumene sulfonate and sodium xylene sulfonate. The solubilizing agents are included in order to control low temperature cloud clear properties. Urea can be optionally used at a concentration of 0.5 wt. % to 7 wt. %. Additionally, the instant compositions can contain 0 to 3 wt. %, more preferably 0.5 wt. % to 2 wt. % of an alkali metal halide such as sodium chloride.

The final essential ingredient in the inventive compositions having improved interfacial tension properties is water. The proportion of water in the compositions generally is in the range of 50% to 95%.

The liquid cleaning composition of this invention may, if desired, also contain other components either to provide additional effect or to make the product more attractive to the consumer. The following are mentioned by way of example: Colors or dyes in amounts up to 0.5% by weight; bactericides in amounts up to 1% by weight; in amounts up to 2% by weight; HEDTA for color improvement under stressed sun

conditions, up to 1% and pH adjusting agents, such as sulfuric acid or sodium hydroxide, as needed. Furthermore, if opaque compositions are desired, up to 4% by weight of an opacifier may be added.

The instant compositions can contain 0 to 0.5 wt. %, more preferably 0.05 wt. % to 0.3 wt. % of a chelating agent such as penta sodium pentetate. The instant composition can also contain 0 to 10 wt. %, more preferably 0.1 wt. % to 9 wt. % of a peroxide source such as an organic peroxide or hydrogen peroxide.

Preservatives which can be optionally used in the instant compositions at a concentration of 0 wt. % to 3 wt. %, more preferably 0.01 wt. % to 2.5 wt. % are:

benzalkonium chloride; benzethonium chloride, 5-bromo-5-nitro-1,3-dioxane; 2-bromo-2-nitropropane-1,3-diol; alkyl trimethyl ammonium bromide; N-(hydroxymethyl)-N-(1,3-dihydroxy methyl-2,5-dioxo-4-imidaxolidinyl)-N'-(hydroxy methyl) urea; 1-3-dimethyl-5,5-dimethyl hydantoin; formaldehyde; iodopropynyl butyl carbamate, butyl paraben; ethyl paraben; methyl paraben; propyl paraben, mixture of methyl isothiazolinone/methyl-chloroisothiazoline in a 1:3 wt. ratio; mixture of phenoxyethanol/butyl paraben/methyl paraben/propylparaben; 2-phenoxyethanol; tris-hydroxyethyl-hexahydrotriazine; methylisothiazolinone; 5-chloro-2-methyl-4-isothiazolin-3-one; 1,2-dibromo-2, 4-dicyanobutane; 1-(3-chloroalkyl)-3,5,7-triazazoniaadamantane chloride; and sodium benzoate. PH adjusting agents such as sulfuric acid or sodium hydroxide can be used as needed.

A cellulosic polymer may be optionally used in the cleaning composition and is selected from the group consisting of methyl cellulose and hydroxy propyl methyl cellulose. Dow Chemical manufactures these cellulosic polymers under the tradename Methocel. The following chart set forth suitable Methocel polymer useful in the instant invention.



	Methoxyl degree of substitution	Methoxyl (%)	Hydroxypropyl degree of substitution	Hydroxypropyl (%)
Methocel A	1.8	30	---	---
Methocel E	1.9	29	0.23	8.5
Methocel F	1.8	28	0.13	5.0
Methocel J	1.3	18	0.82	27
Methocel K	1.4	22	0.21	8.1
Methocel 310 Series	2.0	25	0.8	25

The cellulosic polymer acts to regulate and slow the release of the cleaning composition from the water insoluble substrate.

The bottom and top layers may have different textures and abrasiveness.

5 Differing textures can result from the use of different combinations of materials or from the use of different manufacturing processes or a combination thereof. A dual texture substrate can be made to provide the advantage of a more abrasive side for cleaning difficult to remove soils. A softer side can be used for more delicate or less soiled surfaces. The substrate should not dissolve or break apart in water. It is the vehicle for  
10 delivering the cleaning composition to dishware, flatware, pots and pans. Use of the substrate enhances lathering, cleaning and grease removal.

A wide variety of materials can be used as the substrate. It should have sufficient wet strength, abrasivity, loft and porosity. Examples include, non woven substrates, wovens substrates, hydroentangled substrates and sponges.

15 Examples of suitable non woven water insoluble substrates include, 100% cellulose Wadding Grade 1804 from Little Rapids Corporation, 100% polypropylene needlepunch material NB 701-2.8 –W/R from American Non-wovens Corporation, a blend of cellulosic and synthetic fibres-Hydraspun 8579 from Ahlstrom Fibre Composites, and 80% Viscose/30% PES Code 9881 from PGI Nonwovens Polymer  
20 Corp.

Another useful substrate is manufactured by Jacob Holm-Lidro Rough'n Soft. It is a composition material comprising a 65/35 viscose rayon/polyester hydroentangled spunlace layer with a hydroentangled bonded polyester scribbly layer.

Still another useful substrate is manufactured by Texel. It is a composite  
25 material manufactured from a top layer of coarse fiber 100% polypropylene



needlepunch, a center layer of an absorbent cellulose core manufactured by Little Rapids Corporation as Waddy Grade 1804 and a bottom layer of a fine fiber polyester layer needlepunched together. The polypropylene layer can range from 1.5 to 3.5 oz/sq. yd. The cellulose ranges from 0.5 to 2 oz./sq. yd. The fine fiber polyester layer

5 can range from 0.5 to 2 oz./sq. yd.

The product of the present invention comprising multiple layers may be ultrasonically bonded with appropriate choice of materials after applying the coating of one or more of the layers. Alternatively layers may be bonded together by needlepunch, thermal bonding, chemical bonding, or sonic bonding prior to

10 impregnation.

The following examples illustrate liquid cleaning compositions of the described invention. Unless otherwise specified, all percentages are by weight. The exemplified compositions are illustrative only and do not limit the scope of the invention. Unless otherwise specified, the proportions in the examples and elsewhere in the specification

15 are by weight.

#### Example 1

The following compositions in wt. % were prepared by simple mixing procedure:

Surfactant	A
Part I	
MgLAS	11
NaLAS	6.2
NH4AEOS 1.3 mole EO	14
Amine Oxide	7.9
Salt	1
DMDMH	.11
SXS hydrotrope	3.0
Pentasodium pentetate	.125
Ethanol	6.1
Water	Bal.
Part I Formulas A through D	1
Fabric substrate	1

<sup>1</sup>Top coarse fiber 100% propylene layer, center cellulose layer (Waddington Grade 1804) and bottom fine fiber polyester layer wherein layers are needle punched together.

20

While particular embodiments of the invention and the best mode contemplated by the inventors for carrying out the invention have been shown, it will be understood, of course, that the invention is not limited thereto since modifications may be made by those skilled in the art, particularly in light of the foregoing teachings. It is, therefore, 5 contemplated by the appended claims to cover any such modifications as incorporate those features which constitute the essential features of these improvements within the true spirit and scope of the invention.